

Priority Function PF



若需要中文翻译，请联系我们。


Function

When the cylinder is locked and a key is inserted and turned on the inside, the cylinder can always be locked/unlocked from the outside.

The priority function is always located on one side. This is indicated by PF marked on the respective side of the cylinder. This is very important for cylinder installation.

Available systems

- | | | |
|-------------------------------------|------------------------------------|--------------------------------------|
| 6 Kaba penta | 7 Kaba quattro pluS | 2 Kaba gemini S |
| 4 Kaba quattro S | 5 Kaba experT ²⁾ | 9 Kaba gemini T ²⁾ |
| 3 Kaba quattro ¹⁾ | 1 Kaba gemini ¹⁾ | |

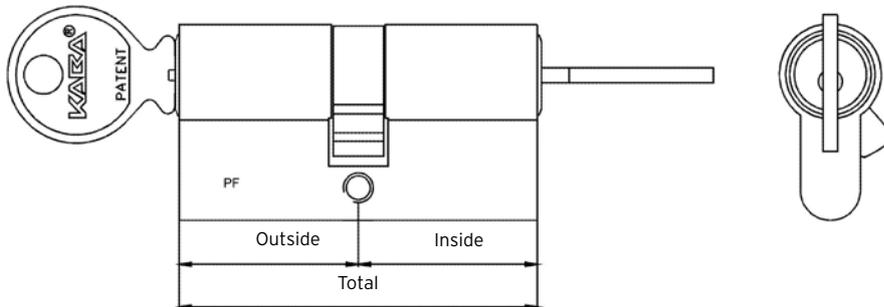

Total Total length of cylinder
 Outside Dimension to center of cam (outside)
 Inside Dimension to center of cam (inside)

Order Code "PF"

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

Example:
 2.DZ35+45PFNI Kaba gemini S double cylinder
 Length 35+45 mm, nickel plated, PF side inside = 45 mm

Example:
 2.DZ35PF+45NI Kaba gemini S double cylinder
 Length 35+45 mm, nickel plated, PF side outside = 35 mm

Please note:

The order code should always indicate on which side the priority function should be installed.
 Also available in Swiss round and Union profile.

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Key Override GF, Cylinder/Key Combination

若需要中文翻译，请联系我们。

Function


When a key is inserted and turned on the inside, all keys that would normally function from the outside no longer function. The advantage of the double cylinder with an emergency master key function is that it can still be opened from the outside using the special emergency master key. The emergency master key function always works on both sides of the cylinder. All double cylinders in the modular system are equipped with the emergency master key function as standard.

Application

Anywhere personal privacy is required, but at the same time the highest degree of safety for emergency situations is also required, and contrary to the priority function, a specially managed (registered) key is required for opening from the outside.

Available systems

- | | | |
|-------------------------------------|------------------------------------|--------------------------------------|
| 6 Kaba penta | 7 Kaba quattro pluS | 2 Kaba gemini S |
| 4 Kaba quattro S | 5 Kaba experT ²⁾ | 9 Kaba gemini T ²⁾ |
| 3 Kaba quattro ¹⁾ | 1 Kaba gemini ¹⁾ | |

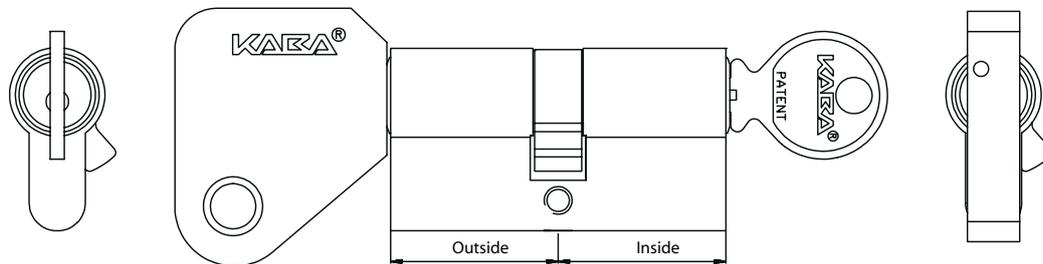

Outside (mm) Dimension to the center of the cam
 Inside (mm) Dimension to the center of the cam

Order Code "GF"

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

*.ZSL.GF.ML Emergency Override Key

Please note:

The emergency master key function is available for both master key systems as well as serial keyings. Emergency keys must always be ordered separately, see page 70.

Also available in Swiss round and Union profile.

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Construction Time System



BAZ

若需要中文翻译，请联系我们。

Function

Using the Kaba construction time system, the final master key system (or parts of it) can be installed during the finishing phase of a site without having any security limitations in the time after the construction phase.

Construction Time Key

Used during the construction phase. Construction time keys can be used as system grand master keys, group keys or individual keys.

Changing key



This specially-designed key is used to convert the cylinders. Once the changing key has been used, construction time keys lose their authorization.

User/Renter key

The final keys (user keys) close the cylinder both before as well as after the conversion.

Available systems

6	Kaba penta	7	Kaba quattro pluS	2	Kaba gemini S
4	Kaba quattro S	9	Kaba gemini T ²⁾	1	Kaba gemini ¹⁾
5	Kaba experT ²⁾	3	Kaba quattro ¹⁾		

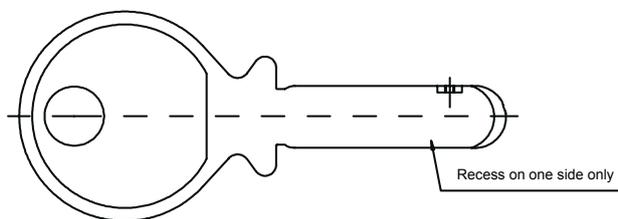

Changing key

Order Code "BAZ"	Outside	Inside	* System code number (1, 2, 3, 4, 5, 6, 7, 9)
*.DZ.30+30.BAZ.**	30	30	
*.DZ.30+35.BAZ.**	30	35	
*.DZ.30+40.BAZ.**	30	40	
*.DZ.100+100.BAZ.**	100	100	

Extensions in 5 mm increments.

All lengths 105 mm and greater per cylinder side are special lengths.

Also available in Swiss round and Union profile.

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Construction Time System 3 BAZ3(508.100.743) for Two Conversions



若需要中文翻译，请联系我们。

Function

Using the Kaba construction time system "3," the final master key system (or parts of it) can be installed during the finishing phase of a site without having any security limitations in the time after the construction phase.

Construction Time Key

Used during the construction phase. Construction time keys can be used as system grand master keys, group keys or individual keys.

Changing key


Two specially-designed keys can convert the cylinders twice during construction time. Once the changing keys have been used, construction time keys lose their authorization.

User/Renter key


The final keys (user keys) close the cylinder both before as well as after the conversions.

Available systems

6 Kaba penta	7 Kaba quattro pluS	2 Kaba gemini S
4 Kaba quattro S	5 Kaba experT ²⁾	9 Kaba gemini T ²⁾
3 Kaba quattro ¹⁾	1 Kaba gemini ¹⁾	



Change key from A to B



Change key from B to C

Order Code "BAZ.508.100.743"	Outside	Inside	* System code number (1, 2, 3, 4, 5, 6, 7, 9)
*.DZ.30+30.BAZ3.508.100.743.**	30	30	
*.DZ.30+35.BAZ3.508.100.743.**	30	35	
*.DZ.30+40.BAZ3.508.100.743.**	30	40	
*.DZ.100+100.BAZ3.508.100.743.**	100	100	

Extensions in 5 mm increments.

All lengths 105 mm and greater per cylinder side are special lengths.

Also available in Swiss round and Union profile.

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Dust and Weather Protection Cap for Europrofile Cylinders



若需要中文翻译，请联系我们。

Configuration

Dust and weather protection cover nickel-plated brass

Special configuration: with plastic dust and weather protection cap

Function

Each Europrofile cylinder can be equipped with the dust and weather protection cover.

Cylinders with pulling protection cannot be equipped with the dust and weather protection cover.

Please note

In the order number, the first measurement is always the outside B.

A configuration with a dust cover on both sides is also possible.

May not be used for security door furniture.

Available systems

6 Kaba penta

7 Kaba quattro pluS

2 Kaba gemini S


4 Kaba quattro S

5 Kaba experT²⁾

9 Kaba gemini T²⁾

3 Kaba quattro¹⁾

1 Kaba gemini¹⁾

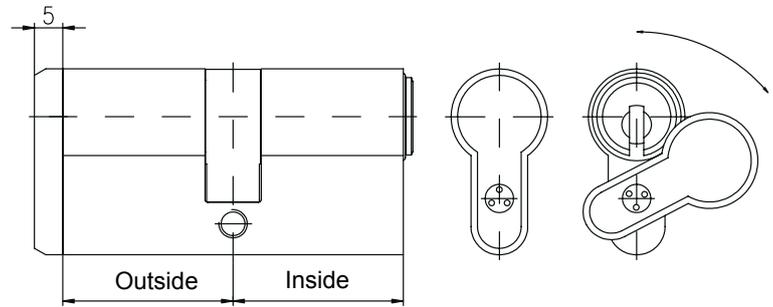

Outside Dimension from outside to center of cam
 Inside Dimension from inside to center of cam

Order code SSW

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

7.DZ30SSW+40.NI

Example:

Kaba quattro pluS double cylinder

Length 30+40 mm, nickel plated,

with dust and weather protection cover on the outside (30 mm)

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Cam 360° Freewheel FL360



若需要中文翻译，请联系我们。

Function



The cam of the double cylinder with 360° freewheel can be turned freely when no key is inserted. When a key is inserted, a fixed connection is made between the key and the cam. As soon as the key is removed, the cam returns to 360° freewheel. Prerequisite for this is that no pressure remains on the cam after the key has been retracted.

Please note

In the order number, the first measurement is always the outside.

Available systems

- | | | |
|---------------------|-------------------------------------|--------------------------------------|
| 6 Kaba penta | 7 Kaba quattro pluS | 2 Kaba gemini S |
| | 4 Kaba quattro S | |
| | 5 Kaba experT ²⁾ | 9 Kaba gemini T ²⁾ |
| | 3 Kaba quattro ¹⁾ | 1 Kaba gemini ¹⁾ |

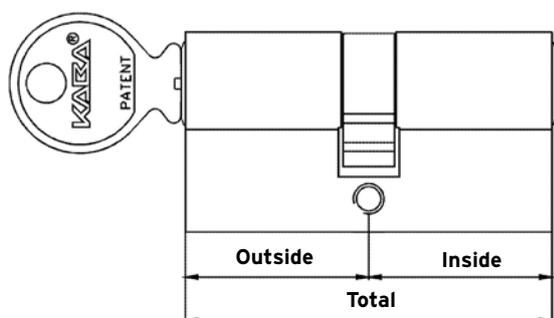

Total	Total length of cylinder
Outside	Dimension from outside to center of cam
Inside	Dimension from inside to center of cam

Order code "FL360"

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

Example:
7.DZ35+45.FL360.NI Kaba quattro pluS double cylinder
Length 35+45 mm, nickel plated

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Cam with Relative Movement RB

若需要中文翻译，请联系我们。

Function

The key turns a full 360°. However, the cam only makes a relative movement for a full key turn (see figures).


Application for specific switch and contact problem solutions.

Not available for the short cylinder configuration.

Order Code

a) **RB.O-90LI** (left)


b) **RB.O-90RE** (right)



from 0° to 90° (left and right)

c) **RB.O-180LI** (left)


d) **RB.O-180RE** (right)



from 0° to 180° (left and right)

e) **RB.O-270LI** (left)


f) **RB.O-270RE** (right)



from 0° to 270° (left and right)


g) **RB.90-270LI** (left)

h) **RB.90-270RE** (right)



from 90° to 270° (left and right)

For special versions, please always provide the cam setting according to the diagram and illustration.



Cams for all Mortise Lock Cylinders



MITN

若需要中文翻译，请联系我们。

Please note


Not available for the short cylinder configuration.

The dimensions of the cam tabs for the 22 mm round profile cylinders deviate from the drawings shown.

4-part cam

not a stocked product, manufactured to order


Order Code: 4FACH



Biffar cam

not a stocked product, manufactured to order


Order Code: BIFFAR



Cam R13.2

Radius 13.2 mm

Order Code: 508.100.618




Cam R17

Radius 17 mm

not a stocked product, manufactured to order

Order Code: R17



Pinion cam


10 sprockets

Order Code: ZR10

10 sprockets with relative movement

Application: for special insert locks with a specified bolt hub


Order Code: ZR10RB



Cam

10 sprockets


Order Code: 508.100.616



Cam

14 sprockets

Order Code: 508.100.617



¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

若需要中文翻译，请联系我们。


18 sprockets

Order code: ZR18

18 sprockets with relative movement

Application

Special insert locks with a specified bolt stroke




Cam with 7.7 mm length

Order code 03192-00

Standard cam 1414-3 milled to 7.7 mm

Application

Door locks from Eastern European countries



Order code with cylinder	Outside length	Inside length
*.DZ.30+30 **.03192-00	30	30

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Increased Drilling Protection, ST, Steel Cylinder Housing



若需要中文翻译，请联系我们。

Configuration

The steel housing is supplied with chemically nickel plated surface finish as standard.

Function

The Kaba steel cylinder - also integrated into the modular system - offers the user a higher degree of security. It has increased drilling and pulling protection and can also be integrated into existing master key systems for the Kaba quattro S and Kaba gemini S.

The Kaba steel cylinder is effective against increased pulling forces and is well suited for high security doors in the outside area of buildings.

Available systems

- | | | |
|---------------------|-------------------------------------|--------------------------------------|
| 6 Kaba penta | 7 Kaba quattro pluS | 2 Kaba gemini S |
| | 4 Kaba quattro S | |
| | 5 Kaba experT ²⁾ | 9 Kaba gemini T ²⁾ |
| | 3 Kaba quattro ¹⁾ | 1 Kaba gemini ¹⁾ |



Order code "ST"

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

Example:
7.DZ30+40.ST.NI Kaba quattro pluS double cylinder,
Length 30+40 mm, with steel housing
Nickel plated

Optional

BS2 increased drilling protection

In the cylinder body made from high-quality steel, the cylinder inserts (insert) are protected by using extra vertically-inserted carbide long pins. This makes it very difficult to drill out the cylinder insert.

Example:
7.DZ30+40.BS2.ST.NI Kaba quattro pluS double cylinder,
Length 30+40 mm, with steel housing
and additional drilling protection
Nickel plated

For additional security components in Kaba lock cylinders, see pages 17 to 19 in chapter "System description."

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Increased Pulling Protection VdS Grade B ZS.V



若需要中文翻译，请联系我们。

Function


The pulling protection equipment provides protection against attempts to pull or twist the lock cylinder out the door lock. This protection is effective against a force of at least 15 kN for both cylinder plugs as well as the cylinder body. To guarantee this value (VdS tested, Grade B, increased forced entry resistance), we recommend using spacers to equalize the empty spaces between the door furniture and pulling protection pin. A 1 mm and 2 mm spacer is included. Additional spacers can be ordered separately (order numbers, see below). The use of security door furniture is mandatory.

Please note

The side with the pulling protection is always listed in the order code.

Available systems


- | | | |
|---------------------|-------------------------------------|--------------------------------------|
| 6 Kaba penta | 7 Kaba quattro pluS | 2 Kaba gemini S |
| | 4 Kaba quattro S | |
| | 5 Kaba experT ²⁾ | 9 Kaba gemini T ²⁾ |
| | 3 Kaba quattro ¹⁾ | 1 Kaba gemini ¹⁾ |

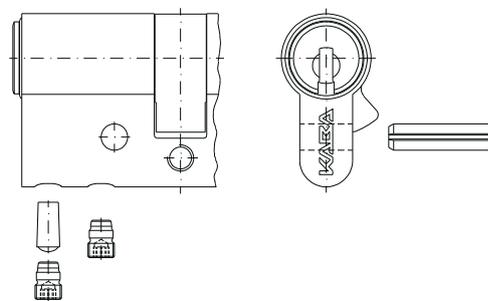

Order Code "ZS.V"

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

6.DZ30ZS.V+40.NI	Example: Kaba penta double cylinder Length 30+40 mm, with pulling protection on the outside (30 mm)
DS1.0	Spacer 1.0 mm
DS1.5	Spacer 1.5 mm
DS2.0	Spacer 2.0 mm
DS3.0	Spacer 3.0 mm
For additional security components in Kaba lock cylinders, see pages 17 to 19 in chapter "System description."	



¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.

Cylinder Body with Steel Reinforcement LAM







若需要中文翻译，请联系我们。

Function

Cylinder reinforcement with steel shims guarantees additional protection against pulling and meets the requirements of Standard EN1303 Attack Resistance Grade 2. The housing is available in all standard surface finishes, the steel shims are nickel plated. This configuration is only available for double cylinders and thumbturn cylinders.

Available systems

- | | | |
|-------------------------------------|------------------------------------|--------------------------------------|
| 6 Kaba penta | 7 Kaba quattro pluS | 2 Kaba gemini S |
| 4 Kaba quattro S | 5 Kaba experT ²⁾ | 9 Kaba gemini T ²⁾ |
| 3 Kaba quattro ¹⁾ | 1 Kaba gemini ¹⁾ | |

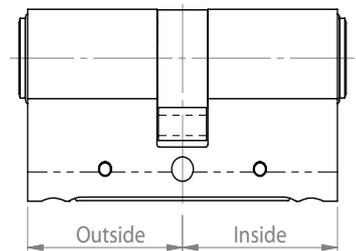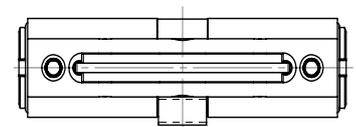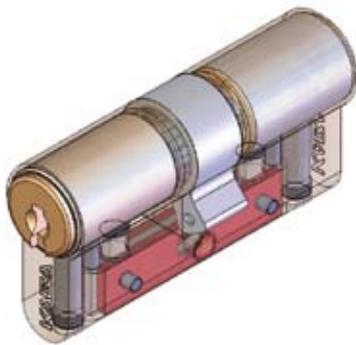

Order Code "LAM"	Outside	Inside
*.DZ.30+30LAM.**	30	30
*.DZ.40+40LAM.**	40	40
*.DZ.50+50LAM.**	50	50
*.DZ.100+100LAM.**	100	100

* System code number (1, 2, 3, 4, 5, 6, 7, 9)

Extensions in 5 mm increments. Same length on both sides not mandatory.
All lengths 105mm and greater per cylinder side are special lengths.

For additional security components in Kaba lock cylinders, see pages 17 to 19 in the chapter "System Description."

¹⁾ The Kaba gemini and Kaba quattro systems are only offered as extensions.

²⁾ The Kaba experT and Kaba gemini T systems are only sold to authorized dealers.