




KABA®

Modul Bedanet® 90 20 – for Access Control

In an access system, the modul extends the performance range of the Bedanet 92 90 control with additional door opening and monitoring functions. The Bedanet 90 20 is integrated into a structured cable installation with an RS-485 interface.

Features of the Bedanet 90 20

- 2 independent RS-485 (2-wire) interfaces for
 - HOST (manager)
 - Subterminals
- Use as digital I/O in access control
- Expansion of further digital I/O connections for the Bedanet 92 90, B-Net 92 50 and B-Net 93 xx
- 2 x 4 digital inputs for door frames and sabotage contacts, door opening
- 2 relays for door opening and relaying of alarms
- Connection of up to 2 subterminals
- Transparent mode for a simple installation
- Simple parameter setting via a serial interface RS 232
- Power supply
 - 9 V DC, 28 V DC, 2,5 VA

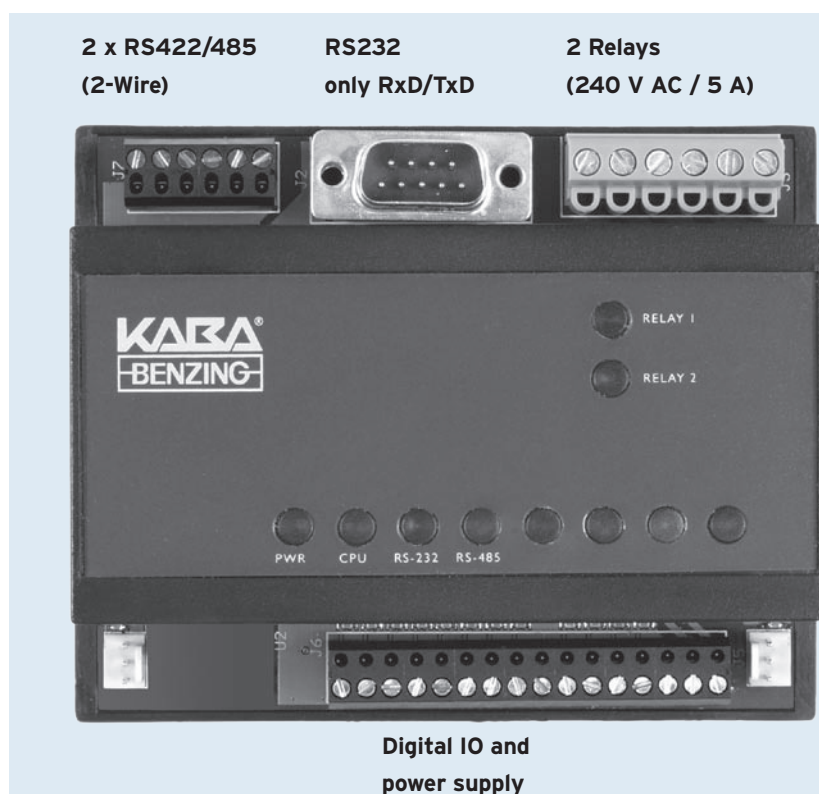

Detailed dimensional drawings can be found as a download on our home page.

Subject to technical changes without notice! Order No. 04035960, Issue 0507

Kaba GmbH
Workforce Management
 Albertstraße 3
 78056 Villingen-Schwenningen
 Germany
 Phone +49 7720 603-0
 Fax +49 7720 603-102

www.kaba.com

KABA®